


CinemaX D2 Smart

Laser Projection TV*



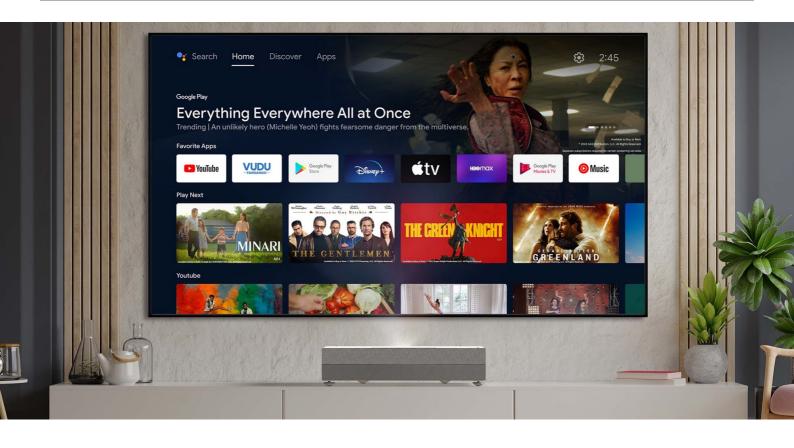

- True 4K UHD resolution with 8.3 million on-screen pixels - HDR and HLG compatibility with HDR brightness adjustment
- Big-screen 100-inch images from less than a foot away with an ultra-short throw lens - Low lag gaming - 16ms in 4K at 60Hz and 4ms in 1080P at 240Hz
- Simplify your entertainment experience with Android TV[™] - Enjoy access to 400,000+ movies, TV shows, live sports, and play music and games across streaming services
- Easy setup with geometry correction 3x3 warping function - Built-in 20W audio supports eARC

Smart 4K UHD ultra short throw projection

Easy access to everything you want to watch.


Simplify your entertainment experience with Android TV[™] on the CinemaX D2 Smart ultra short throw projector. Enjoy access to 400,000+ movies, TV shows, live sports, and play music and games across streaming services and even customize your home screen to display

Specifications

EAN: 5055387666054, Colour: Black	<
EAN: 5055387666061, Colour: White	Э
UPC: 796435 81 449 6, Colour: Blac	
UPC: 796435 81 448 9, Colour: Whi	
Display/image	
Display technology	DLPTM
Resolution	UHD (3840x2160)
Brightness	3,000 lumens
Contrast ratio	1,800,000:1
Native aspect ratio	16:9
Aspect ratio - compatible	4:3
Keystone correction -	10°
horizontal	10
Keystone correction - vertical	10°
Horizontal scan rate	31 ~ 135Khz
Vertical scan rate	24 ~ 120Hz
Uniformity	90%
Screen size	85" ~ 120" diagonal
Lamp info	ee ille aagena
Light source type	Laser
LASER life	30,000 hours
Optical	
Throw ratio	0.25:1
Projection distance	18.5" - 25.98"
Focal length (mm)	18.5 - 25.86 525mm/20.669"
Pocal length (mm) Native offset	525mm/20.009 124%
	127/0
Connectivity	
Connections	Inputs 3 x HDMI 2.0, 1 x RS232
	Outputs 1 x S/PDIF, 1 x USB-A power 1.5A, 1 x Audio
	3.5mm
General	
Noise level (typical)	26dB
Noise level (max)	28dB
PC compatibility	UHD, WQHD, WUXGA, FHD, UXGA, SXGA, WXGA, HD, XGA,
	SVGA, VGA, Mac
2D compatibility	480i/p, 576i/p, 720p(50/60Hz), 1080i(50/60Hz),
	1080p(50/60Hz), 2160p(50/60Hz)
	Events and 1000-04 700-50 / 00 Events and the 1000-
3D compatibility	Frame-pack: 1080p24, 720p50 / 60 Frame sequential: 1080p,
	WXGA, XGA, SVGA 120Hz
3D	WXGA, XGA, SVGA 120Hz 3D ready
3D Security	WXGA, XGA, SVGA 120Hz 3D ready Kensington Lock, Password protected interface
3D compatibility 3D Security OSD / display languages	WXGA, XGA, SVGA 120Hz 3D ready
3D Security OSD / display languages	WXGA, XGA, SVGA 120Hz 3D ready Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional)
3D Security OSD / display languages	WXGA, XGA, SVGA 120Hz 3D ready Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese
3D Security OSD / display languages Operating conditions	WXGA, XGA, SVGA 120Hz 3D ready Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) 5°C~40°C/41°F~104°F, max altitude 3000M/9843ft, max
3D Security OSD / display languages Operating conditions Remote control	WXGA, XGA, SVGA 120Hz 3D ready Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) 5°C~40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 85%
3D Security OSD / display languages Operating conditions Remote control Speaker count	WXGA, XGA, SVGA 120Hz 3D ready Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) 5°C-40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote
3D Security OSD / display languages Operating conditions Remote control Speaker count Watts per speaker	WXGA, XGA, SVGA 120Hz 3D ready Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) 5°C-40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 2
3D Security OSD / display languages Operating conditions Remote control Speaker count Watts per speaker	WXGA, XGA, SVGA 120Hz 3D ready Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) 5°C-40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 2 10W
3D Security OSD / display languages Operating conditions Remote control Speaker count Watts per speaker	WXGA, XGA, SVGA 120Hz 3D ready Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) 5°C-40°C/41°F-104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 2 10W AC power cord 2x AAA batteries Basic user manual
3D Security OSD / display languages Operating conditions Remote control Speaker count Watts per speaker In the box	WXGA, XGA, SVGA 120Hz 3D ready Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) 5°C-40°C/41°F-104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 2 10W AC power cord 2x AAA batteries Basic user manual android TV stick & remote
BD Security DSD / display languages Operating conditions Remote control Speaker count Watts per speaker n the box	WXGA, XGA, SVGA 120Hz 3D ready Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) 5°C-40°C/41°F-104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 2 10W AC power cord 2x AAA batteries Basic user manual
3D Security DSD / display languages Operating conditions Remote control Speaker count Watts per speaker In the box	WXGA, XGA, SVGA 120Hz 3D ready Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) 5°C-40°C/41°F-104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 2 10W AC power cord 2x AAA batteries Basic user manual android TV stick & remote
3D Security OSD / display languages Operating conditions Remote control Speaker count Watts per speaker In the box	WXGA, XGA, SVGA 120Hz 3D ready Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) 5°C-40°C/41°F-104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 2 10W AC power cord 2x AAA batteries Basic user manual android TV stick & remote
3D Security OSD / display languages Operating conditions Remote control Speaker count Watts per speaker In the box	WXGA, XGA, SVGA 120Hz 3D ready Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) 5°C-40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 2 10W AC power cord 2x AAA batteries Basic user manual android TV stick & remote 4.00ms
3D Security OSD / display languages Operating conditions Remote control Speaker count Watts per speaker In the box Input lag Power Power supply Power consumption (standby)	 WXGA, XGA, SVGA 120Hz 3D ready Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) 5°C-40°C/41°F-104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 2 10W AC power cord 2x AAA batteries Basic user manual android TV stick & remote 4.00ms 100 ~ 240V, 50 ~ 60Hz
3D Security	 WXGA, XGA, SVGA 120Hz 3D ready Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) 5°C-40°C/41°F-104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 2 10W AC power cord 2x AAA batteries Basic user manual android TV stick & remote 4.00ms 100 ~ 240V, 50 ~ 60Hz 0.5W
3D Security OSD / display languages Operating conditions Remote control Speaker count Watts per speaker In the box Input lag Power Power supply Power consumption (standby) Power consumption (min)	 WXGA, XGA, SVGA 120Hz 3D ready Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) 5°C-40°C/41°F-104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 2 10W AC power cord 2x AAA batteries Basic user manual android TV stick & remote 4.00ms 100 ~ 240V, 50 ~ 60Hz 0.5W 190W
3D Security OSD / display languages Operating conditions Remote control Speaker count Watts per speaker In the box Input lag Power Power Power consumption (standby) Power consumption (min) Power consumption (max)	 WXGA, XGA, SVGA 120Hz 3D ready Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) 5°C-40°C/41°F-104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 2 10W AC power cord 2x AAA batteries Basic user manual android TV stick & remote 4.00ms 100 ~ 240V, 50 ~ 60Hz 0.5W 190W
3D Security OSD / display languages Operating conditions Remote control Speaker count Watts per speaker In the box Input lag Power Power supply Power consumption (standby) Power consumption (min) Power consumption (max) Weight and dimensions	 WXGA, XGA, SVGA 120Hz 3D ready Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) 5°C-40°C/41°F-104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 2 10W AC power cord 2x AAA batteries Basic user manual android TV stick & remote 4.00ms 100 ~ 240V, 50 ~ 60Hz 0.5W 190W 230W







Copyright © 2023 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments™. All other trademarks are the property of their respective owners. All specifications subject to change at any time. "Google, Android TV, Google Play, YouTube, and other related marks and logos are trademarks of Google LLC." Included in the box, the dongle must be connected to the

projector via HDMI in order to utilize Android TV features. Google Assistant is not available in certain languages and countries. Availability of services varies by country and language. 31052023062520